



MINI-LITE

ULV Fog Applications



CURTIS DYNA-FOG[®] Ltd.
from **B&G**

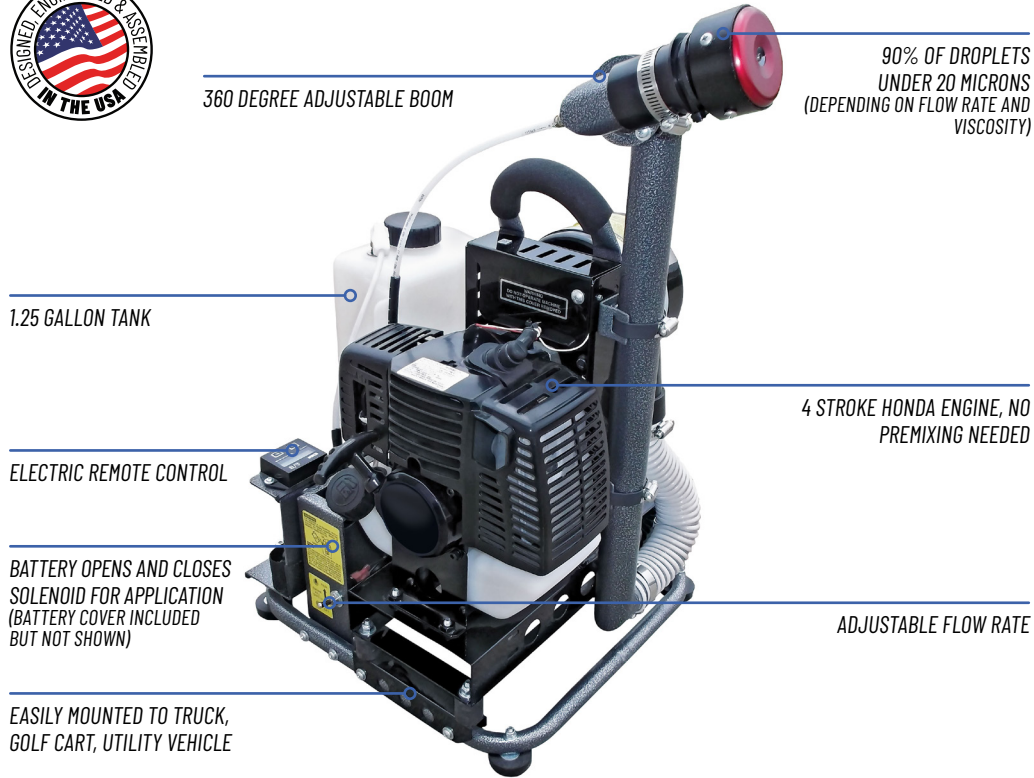

360 DEGREE ADJUSTABLE BOOM

90% OF DROPLETS UNDER 20 MICRONS (DEPENDING ON FLOW RATE AND VISCOSITY)

1.25 GALLON TANK

4 STROKE HONDA ENGINE, NO PREMIXING NEEDED

ELECTRIC REMOTE CONTROL

BATTERY OPENS AND CLOSES SOLENOID FOR APPLICATION (BATTERY COVER INCLUDED BUT NOT SHOWN)

ADJUSTABLE FLOW RATE

EASILY MOUNTED TO TRUCK, GOLF CART, UTILITY VEHICLE



FEATURES & BENEFITS

VERSATILE

- Lightweight welded steel tube frame for 1-person lifting
- Can be used on utility vehicle, golf cart, or truck for easy application
- Remote control allows the driver or passenger to start and stop spray while driving

ULTRA LOW VOLUME FOG

- Single nozzle produces small droplets ideal for mosquito and fly control
- Metering valve to produce flow rate is adjustable from 0-7 oz/minute
- Boom adjusts in height, 360 degrees in the vertical and horizontal planes

TANK

- Corrosion-resistant, high density polyethylene
- Formulation tank: 1.25 gallons (4.73 liters)
- Gas tank: 1 liter (0.26 gallons)

POWER

- 12 VDC, 7.5 AH sealed rechargeable battery with protective case and charger (North America only) powers formulation delivery system
- Honda motor powers rotary blower with 95 cfm flow rate

SHIPPING INFORMATION

- Dimensions: 18"W x 18.5"L x 30"H
- Volume: 5.62 cubic feet
- Weight: 38 lbs

INDUSTRIES

Pest control.
Sanitation.
Vector control.

COMPATIBILITY

Water-based Formulations.
Oil-based Formulations.

SCAN THIS QR CODE FOR PART INFORMATION FOR THE MINI-LITE.



DESCRIPTION	LEGACY PART #	ORDER #
Mini-Lite	63910	1108005443